
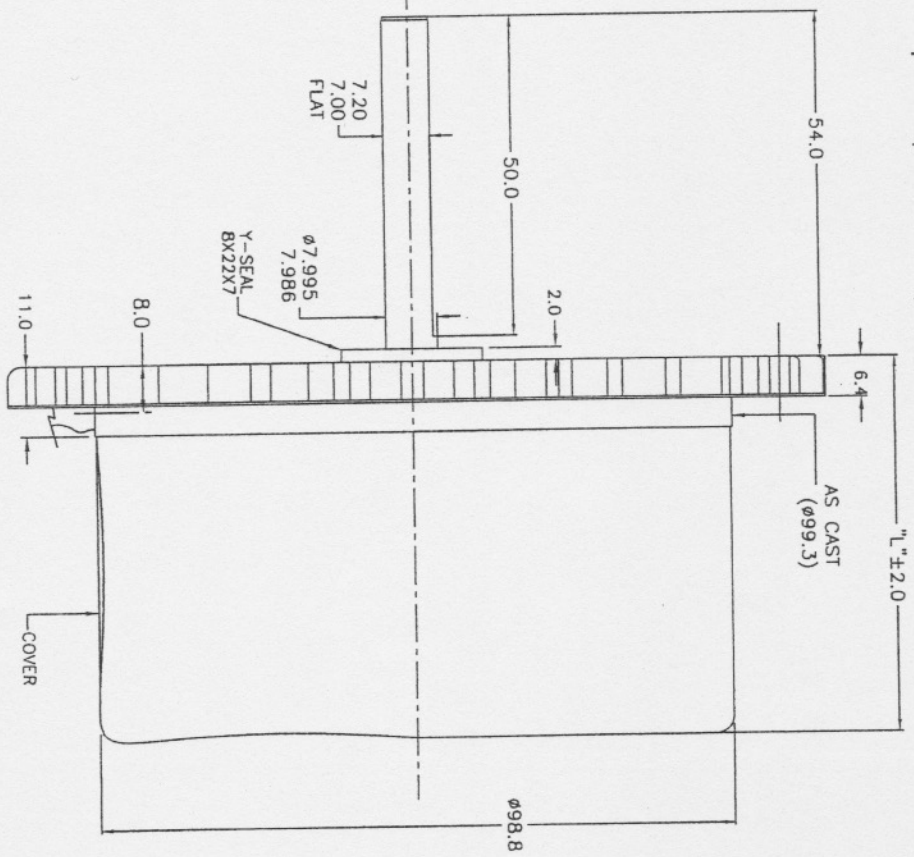


NOTE: THIS IS CONFIDENTIAL PROPERTY OF BMC. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES WITHOUT OUR WRITTEN CONSENT.

16510

Ø6.5 THRU HOLES,  
3 PLACES 120° APART  
ON A 114.30 B.C.

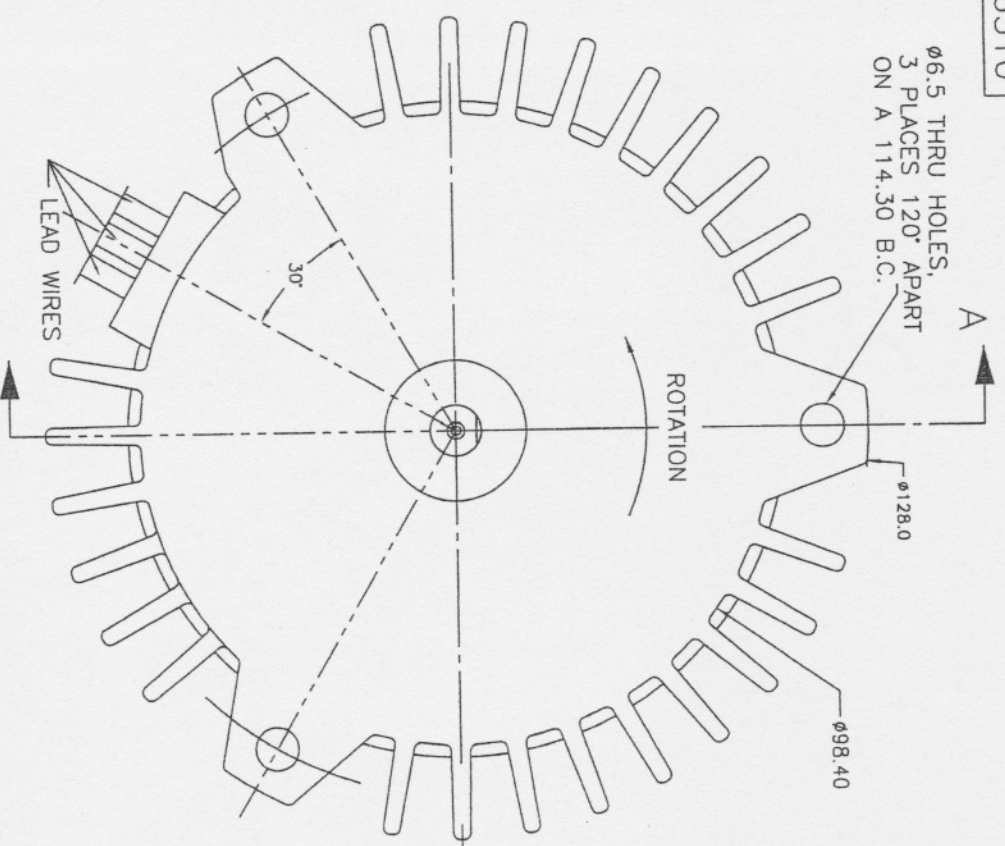

PART NO.	'L'	WATTS
16510-1	48.0	200
-2	59.0	400
-3	64.0	600

- NOTES:
1. ALL DIMS. ARE IN MM.
  2. HALL SENSORED DRIVE ELECTRONICS MOUNTED INSIDE OF MOTOR.

REV.	DATE	BY	ECN	REMARKS	CK

TOLERANCES UNLESS NOTED  
 .0 ±.25  
 .00 ±.13  
 ANGLE ± 2'  
 (X) REF. DIM.

ANGULARITY  
 ○ CONCENTRICITY  
 (X) REFERENCE DIM.  
 Ø DIAMETER  
 MATERIAL-

**BMC** BRUSHLESS MOTOR CORP.  
 20447 NORDHOFF ST. CHATSWORTH, CA 91311 USA

MOTOR OUTLINE ASSEMBLY  
 36 FR

16510C REV.-B